



MANGO

Model for ANnotating Generic Objects

Laurent MICHEL, F. Bonnarel, G.Landais, M. Louys, M. Molinaro, J. Salgado



Theodore Ross with Pine.

Gabriel Sculp.

MANQUIER ou MANGO.



Theodore Ross with Pine.

Gabriel Sculp.

MANQUIER ou MANGO.



Theodore Ross with Pine.

Gabriel Sculp.

MANQUIER ou MANGO.

What MANGO Is for

Provide a **model view** on **tabular data**

- On data row ⇨ one Mango instance

Reconstruct **complex quantities** whose components are distributed at **different VOTable locations**


- INFO/PARAMS/FIELD/COOSYS/TIMEYS
- Missing meta-data (e.g. vocabulary)

- Born after a poll to get **use-cases** for a **source data-model** (Paris 2019)
- Kept dormant while the pandemic, the DM workshop and the MIVOT process

What Are Complex Quantities (or Properties)

Quantities with more than one coordinate	<ul style="list-style-type: none">• Position• proper motion• CCD position• errors
Quantity with errors	<ul style="list-style-type: none">• many
Quantity with specific coordinate systems	<ul style="list-style-type: none">• Photometric calibration/filter• Space/time coordinate system• Sparse axis
Quantity linked with other quantities	<ul style="list-style-type: none">• Photometry + time stamps• Position + quality flag
Mix of all above cases	

Model Overview

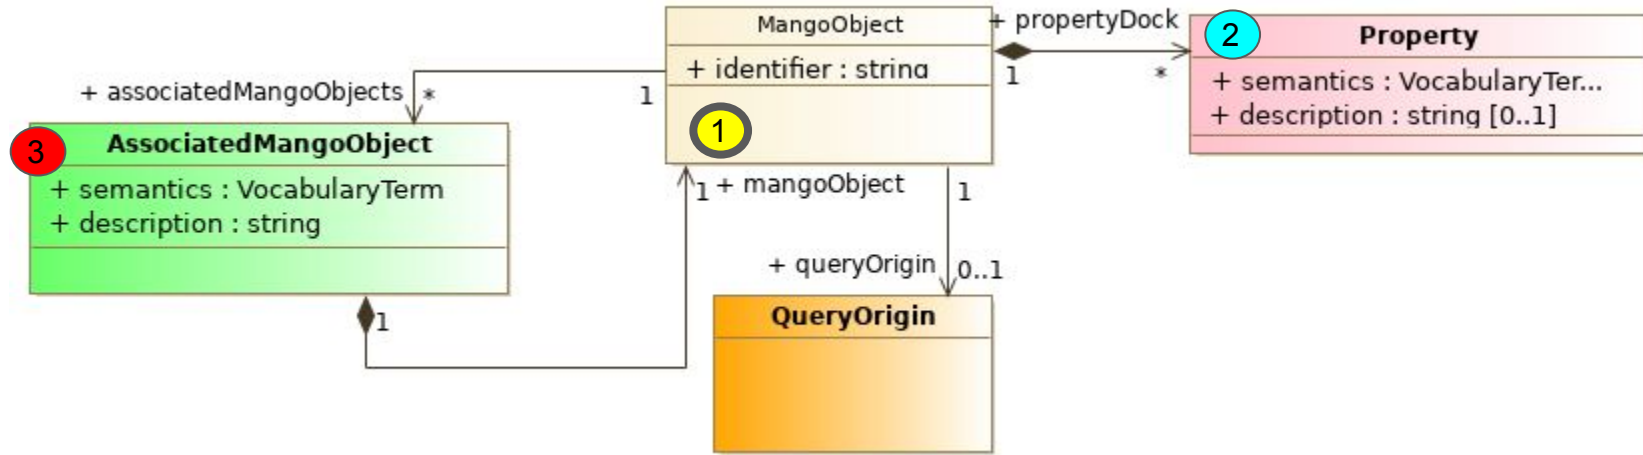

3

Mango object association

- Sources with detections

1

Model Core

- Identifier
- Data origin

2

Dock hosting the properties

- EpochPosition
- Brightness
- Color
- Physical measurements
- Flags
- ...

Another Model Overview



Market stall: Properties


Properties can be viewed as **independent models** and used as such....



Basket: MangoObject

... or they can be carefully embedded into a **MangoObject**.

Origin of the Mapped Data

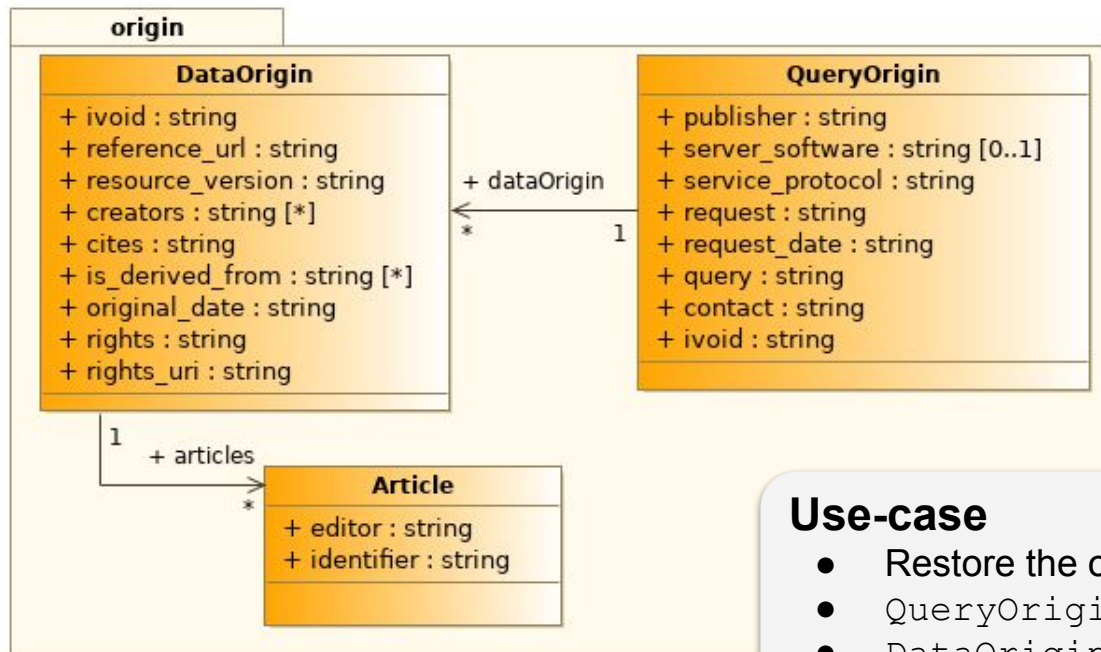

Use-case


- Restore the origin of mapped data
- QueryOrigin : Query that produced the VOTable
- DataOrigin: Origins of the queried data

Added value

- Structured view on **<INFO>**
- Allows to attach multiple data origin with one query
 - TAP join

Supported Properties



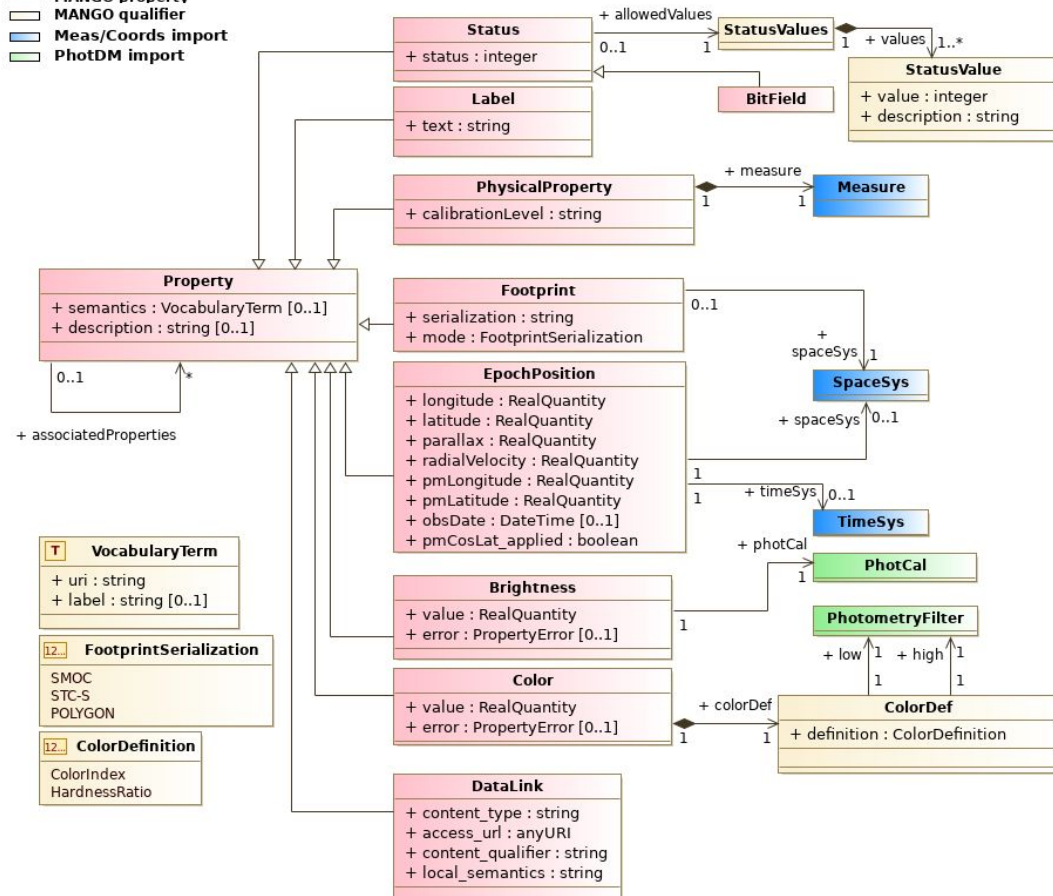

 MANGO property
 MANGO qualifier
 Meas/Coords import
 PhotDM import




A property is a **class modeling a quantity** that is present in one or more columns of the data table **extended** with a **semantics block**

- Property **values** can be set with **table data** or **literal values**
- Most of the properties are modeled with MANGO **built-in classes**
- Some can include **imported classes** (Coords or photDM)

Supported Properties


 MANGO property
 MANGO qualifier
 Meas/Coords import
 PhotDM import

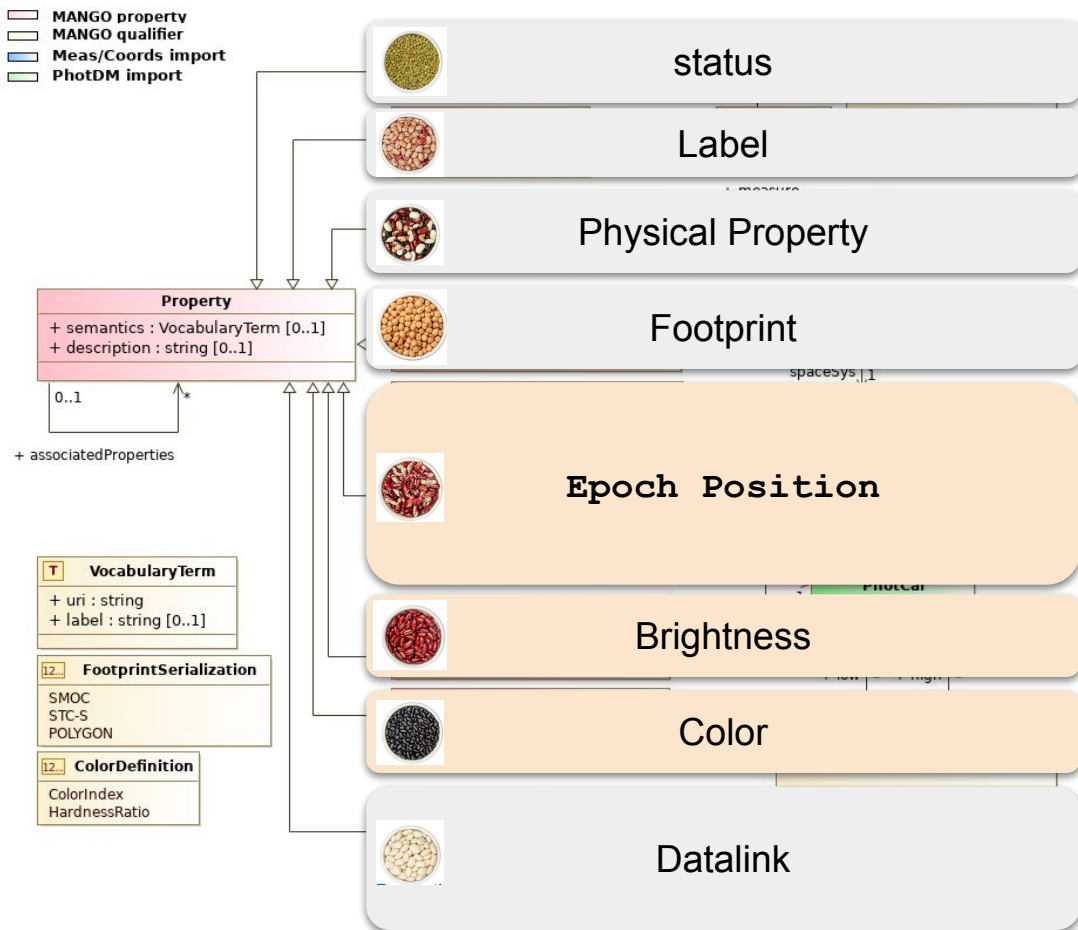

A property is a **class modeling a quantity** that is present in one or more columns of the data table **extended** with a **semantics block**

- Most of the properties are modeled with MANGO **built-in classes**
- Some can include **imported classes** (Coords or photDM)

The Epoch Position Property

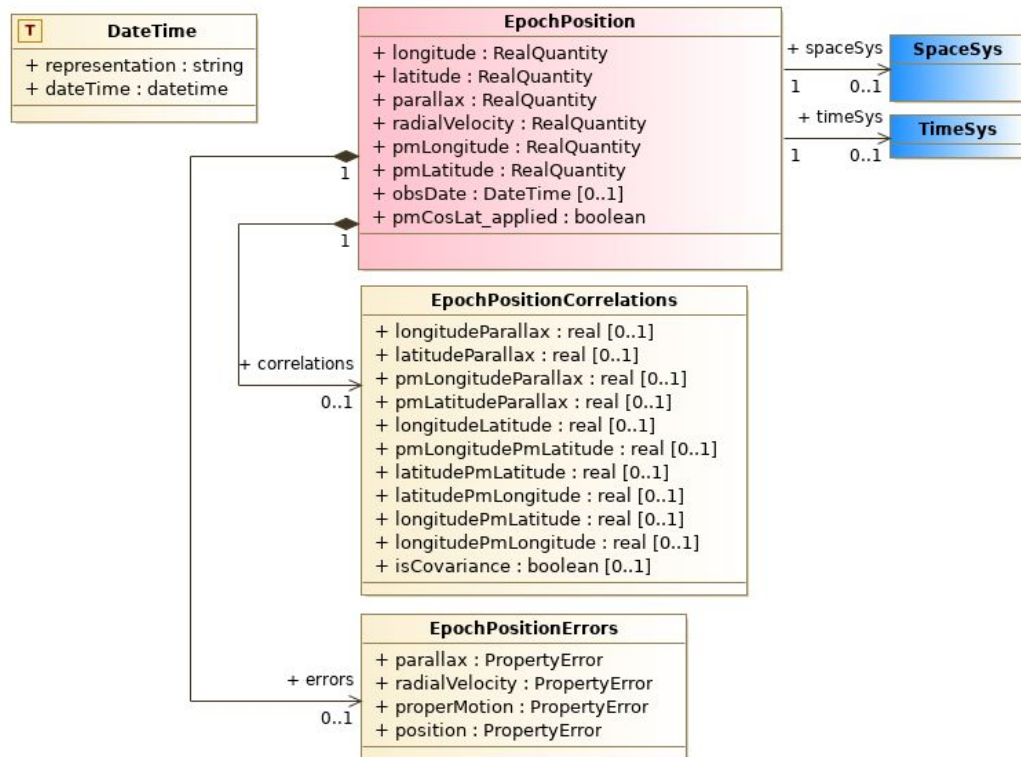

Added value

- MANGO flagship

All components in one flat class

- Share the same coordinate systems
- Coordinate systems are imported from **Coordinates** data model


Correlation support

- Flatten correlation matrix
- A 6x6 matrix would be out of control

Implementations

- Vizier cone-search
- Xtapdb (see apps talk)
- Pyvo MIVOT package

Brightness Property

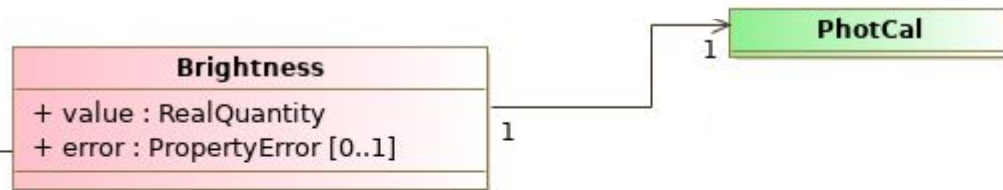


Use-case

- A model for the photometric data with error and calibration

Added value:

- Defines a place holder for photometric calibrations in VOTables
- Bind a magnitude or count rate value with
 - An error
 - A photometric calibration (imported from **PhotDM**)

Color Property

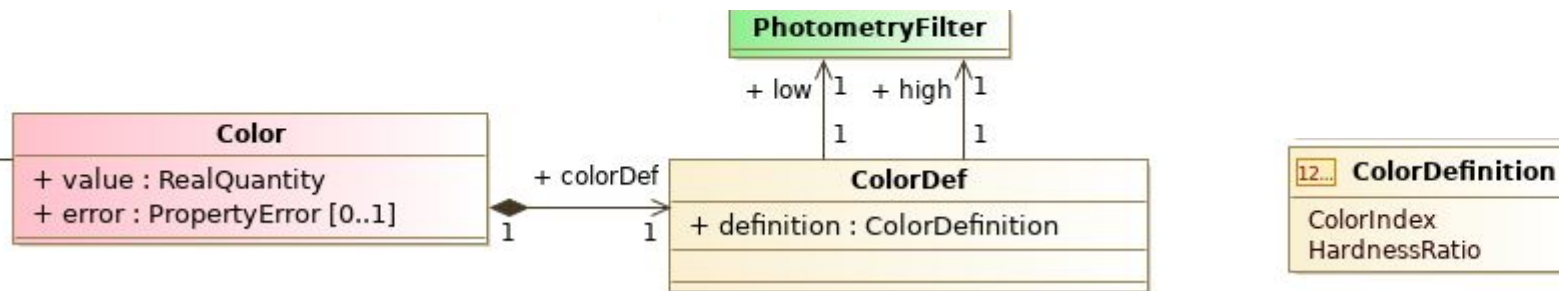


Use-case

- A model for the color data with error and filters
- Distinction between color index and hardness ratio

Added value:

- Defines a place holder for photometric filters in VOTables
- Bind a color or a hardness ratio with
 - An error
 - 2 photometric filters (high and low imported from **PhotDM**)

Footprint Property

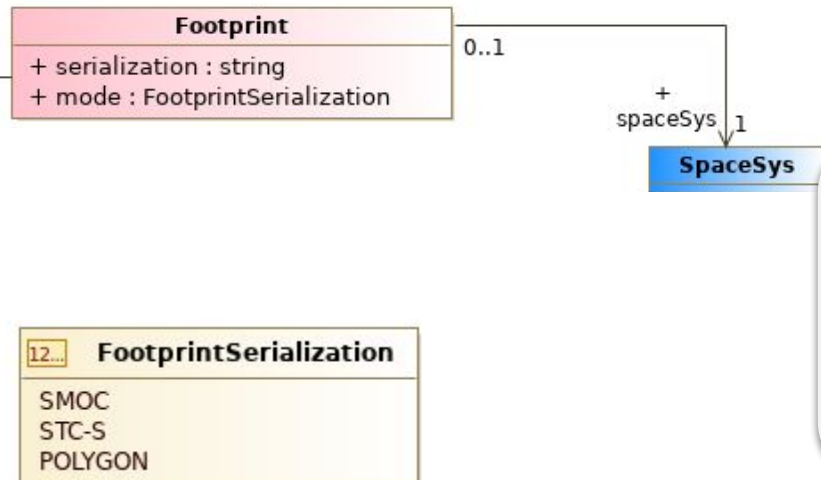

Use case

- Standard description of extended objects
 - Gaz clouds

String serialization of complex shapes

- Serialization mode (MOC, STC-S...) given by the **ShapeSerialization** enum
- Space coordinate systems imported from **Coordinates** data model

Added Value

- Add a semantics to shape serialization

Support of Classes of the Measurement Model



Same pattern for all classes

- A value (can be a vector)
- A coordinate system (frame + axis)
- An error

Placeholder for classes of the Measurements model

- Position
- Proper Motion
- Velocity
- Time
- Polarization
- Generic Measure


Great flexibility

- Accurate description of all axis
- Polymorphism allowing multiple representations quantities

Add a calibration level

- borrowed from Obscore
- <http://www.ivoa.net/rdf/processing-level>

Status Property



Use case

- Flag values
 - Detection quality
 - Source variability


Set of allowed values

- Allowed values come with their descriptions

Added Value

- Make status values machine readable
 - Query setup
 - Value understandable by the client
- Give semantics to the status

DataLink Property

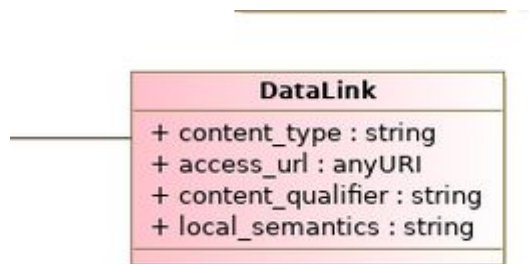


User Case

- Flat DataLink serialization for services exposing URLs in data tables and not running data link services

Added Value

- Add a semantics to flat URLs

Error Package

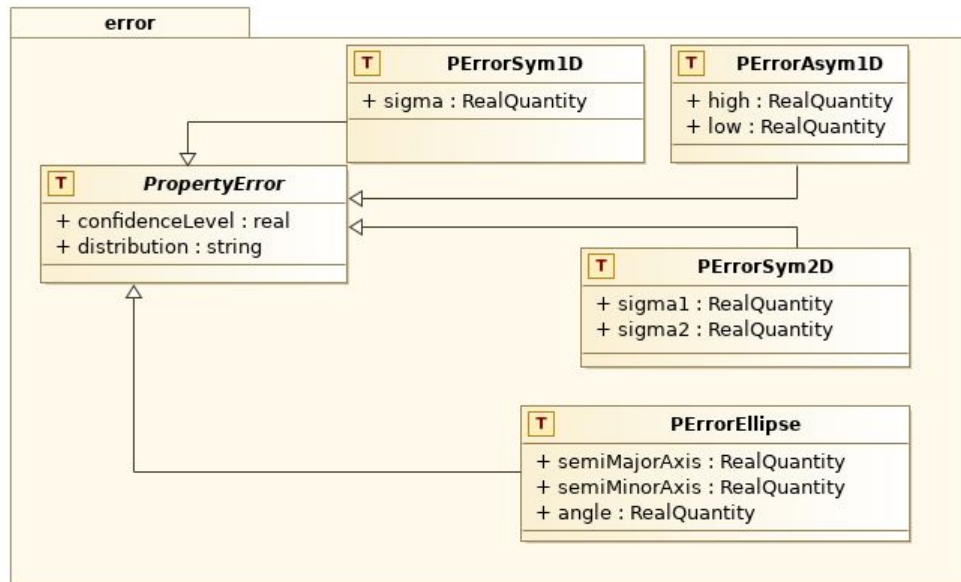





Use-case:

- Adapted to the EpochPosition
- Adapted to the cross-match

Added Value:

- Confidence level
- Statistical distribution
 - Both important for X-Match

Property Association

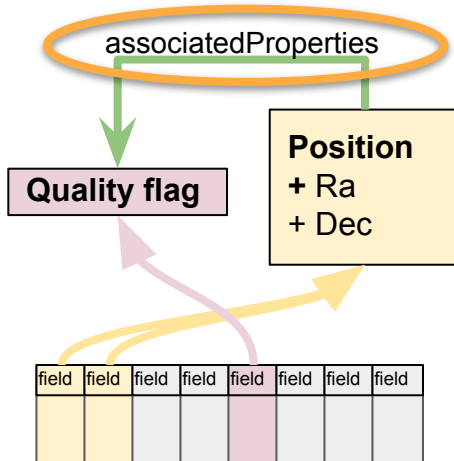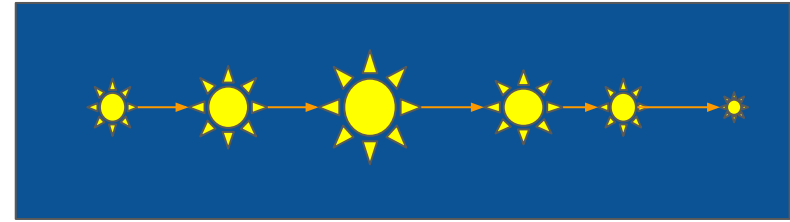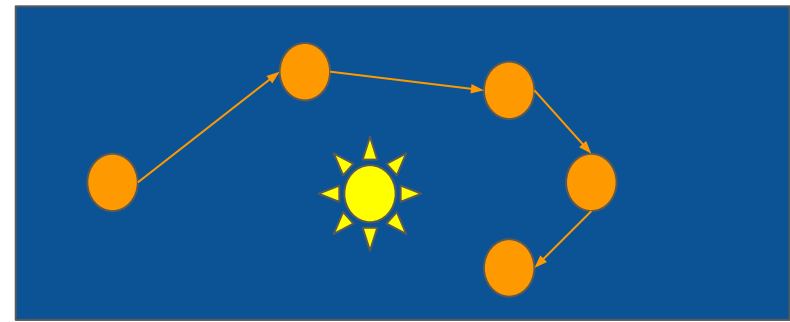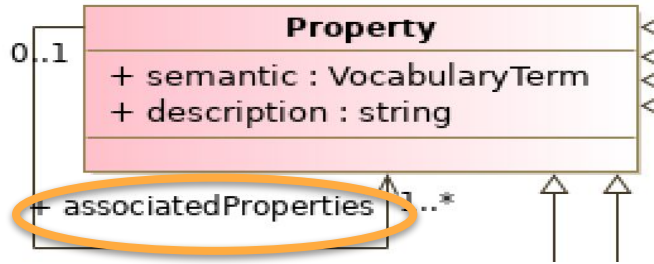

make it easier to interpret time-domain data.

- Variable objects


Composite objects

- Orbiting system

Associating properties with a flag makes it easier to filter data.

- Quality flag

Edition Workflow

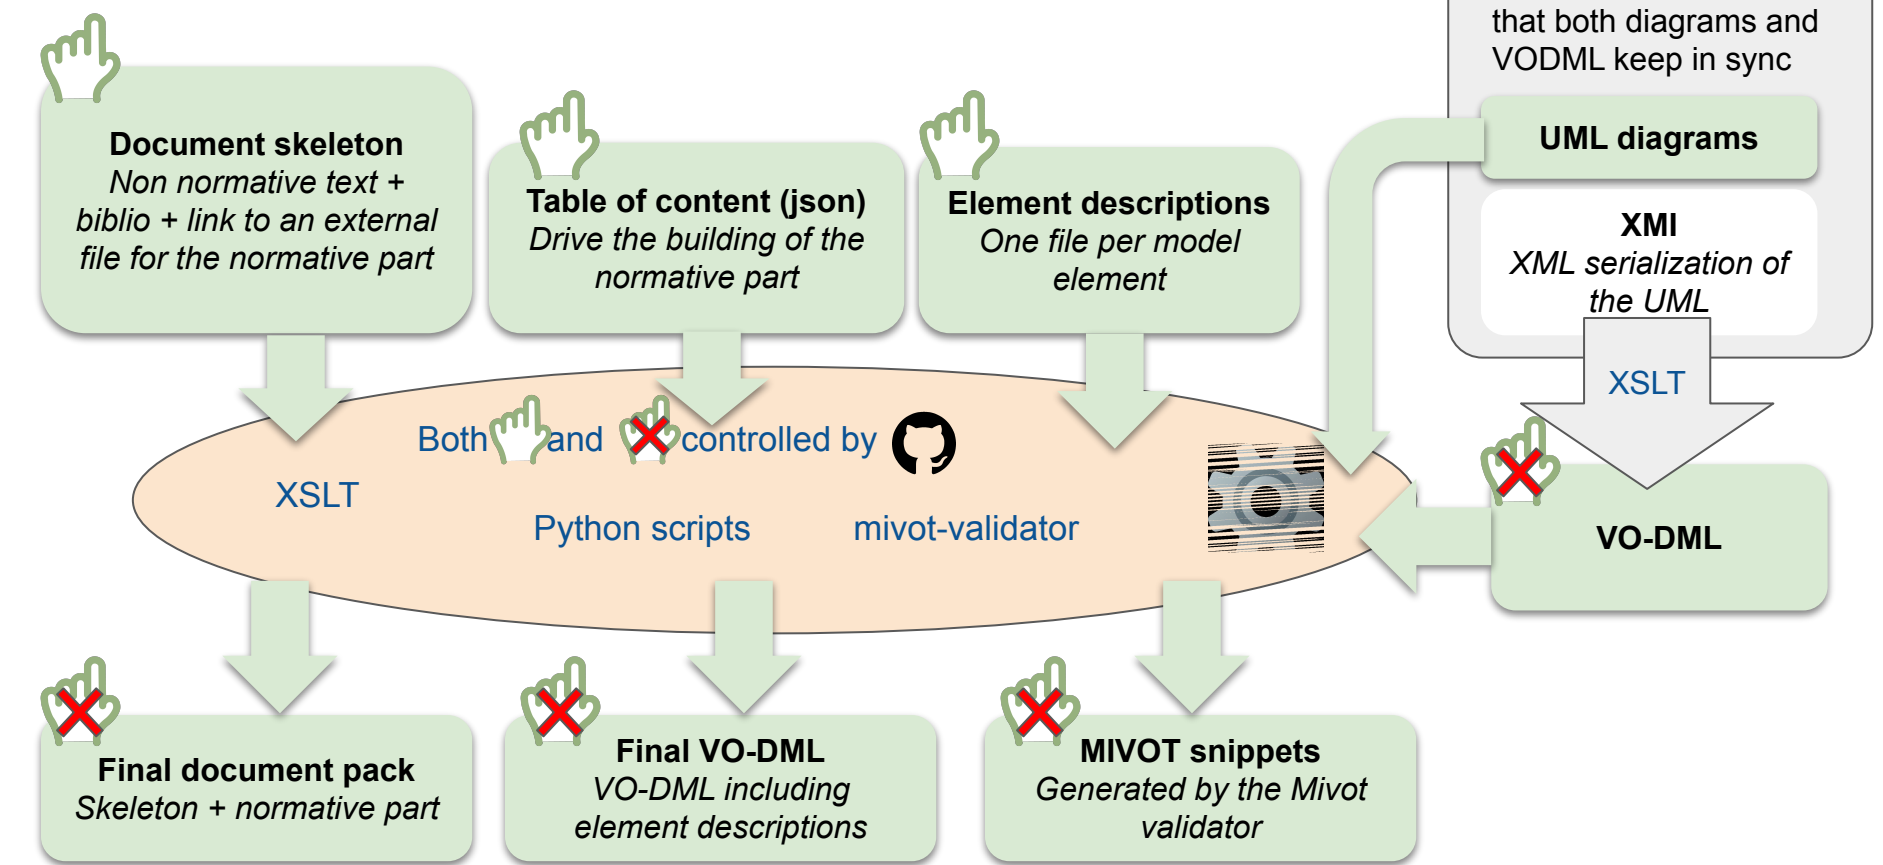

Reference Implementations

4 static files

- Cover most of the features
- VOTable data mapped on MANGO with MIVOT
- Annotation possibly completed by hand
- Part of the project repository

3 services

- Vizier ASU (EpochPosition)
- Vizier ConeSearch (EpochPosition)
- XTapDB (XMM data, based on VOLTT, many properties)

PYVO API (1.7+)

- Consume VOTable data through the MANGO mapping
- Read EpochPositions as SkyCoord instances
- Helper to map data on MANGO
- More in apps session

Class	xtapdb	Gaia	datalink	vizier_cs_l_239
MangoObject	X	X	X	
QueryOrigin		X		
EpochPosition	X	X		X
Brightness	X	X		
Color	X	X		
FootPrint			X	
Status	X			
Label			X	
BitField				
PhysicalProperty			X	
DataLink			X	
PhotCal	X	X		
PhotFilter	X	X		
SpaceSys	X	X		X
TimeSys	X	X		
PErrorSym1D	X	X		
PErrorAsym1D		X		
APErrorSym2D		X		
Ellipse				
AssociatedProperties	X			

Status

A lot of work put in this standard.

- Document
- Services deployment
- PyVO implementation
- Discussion
- Reviews

Ready for RFC

- Waiting for the IVOA green light
- See you on the RFC page.
- Meanwhile
 - <https://github.com/ivoa-std/MANGO>


We will roll out the **red carpet** for anyone interested in **implementing** this framework

backup

A Important Clarification

- **Why some elements present in the VOTable are duplicated in the model?**
 - Property description
 - unit
- **Several (good) Reasons**
 - a. VOTable column descriptions are column-related whereas MANGO description are quantity-related
 - b. If they are missing meta-data in a particular VOTable, we want to be able to set them in the model mapping block.
 - c. We want to be able to export self-consistent model instances
 - i. No longer dependencies with the VOTable context
 - ii. E.g. as JSON feeding a micro-service (see PyVO implementation)

Different Datasets - one Model

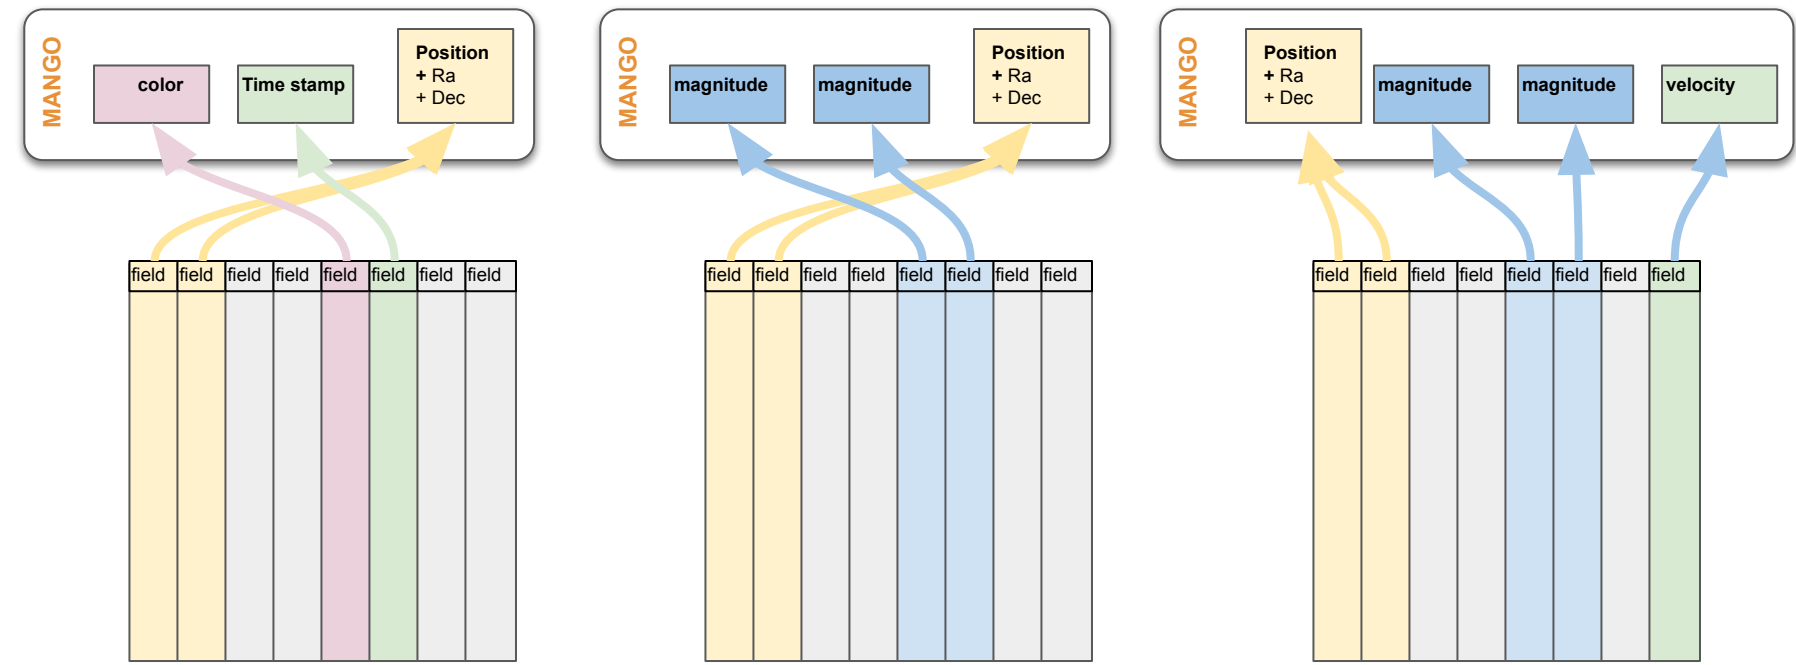

The model describes

- Global metadata
- Open set of properties
- Properties associations

The model does **not specify** any pattern of **expected properties**.