

#### Temporal exploration in Aladin Time series and T-MOC


#### Interop meeting – 28 May to 1 June 2017

Pierre Fernique On behalf of the Aladin team









vatoire **astronomique** de Strasbourg | ObAS

## The Aladin time exercice

#### • What we would like:

- Resource discovery by time constraints
- Time plots (time series)
- Time coverages (collections of time ranges)
- Aladin provides good responses for Space.
  Why not reuse the same recipe for Time ?

#### □ Time exercice level 1...

- How to know the time system of our data (format, scale, observer, offset).
   Notably in VOTable:
  - TIMESYS ?
  - GROUP, VODML serialization ?
- For easy interoperability, which reference time system can be used ?

## ... in Aladin proto

#### Presently, no time meta information in VOTable => Aladin prototype uses heuristics

CDS/J/AcA/58/163/catalog


VOTable format .Table J/AcA/58/163/catalog -assuming Time column 15 (proba=90.0%) timesys unknown (assuming
TDB/Barycentric)
-assuming RADEC in degrees column 1 for RA and 2 for DEC
[RA=0 (proba=100.0%) DE=1 (proba=100.0%) PMRA=-1 (proba=0.0%) PMDEC=-1
(proba=0.0%) X=-1 (proba=0.0%) Y=-1 (proba=0.0%)]
-Coordinate system references found:
ID="J2000" => eq_FK5 Eq=J2000
=> RA/DEC coordinate conversion not required: ref="J2000" => FK5(J2000.0) to
ICRS
-found CSV DATA (field sep=Tab record sep=\n)
-Found 3 lines CVS header with dash separator
-assuming Time format:JD timeOffset: 2450000.0

		Visible	Coo	Name	Description	Unit	Datatype	UCD
	1		RA	_RAJ2000	Right ascension (FK5, Equinox=J2000.0) (co	deg	double	pos.eq.ra;meta.main
	2		DE	_DEJ2000	Declination (FK5, Equinox=J2000.0) (compu	deg	double	pos.eq.dec;meta.m.
	3			recno	Record number assigned by the VizieR team		int	meta.record
	4			n_Star	Simbad column added by the CDS		char	meta.note
	5			Star	Cepheid ID (OGLE-LMC-CEP-NNNN)		char	meta.id;meta.main
	6			Field	OGLE-III field (LMCNNN.N)		char	meta.id;obs.field
	7	$\checkmark$		OGLE	OGLE-III database number		int	meta.id
	8			Mode	Mode of pulsation		char	meta.code;src.var
	9			RAJ2000	Right ascension, equinox J2000.0	"h:m:s"	char	pos.eq.ra
	10			DEJ2000	Declination, equinox J2000.0	"d:m:s"	char	pos.eq.dec
	11			<imag></imag>	? Intensity mean I-band magnitude	mag	float	phot.mag;em.opt.I
	12			<vmag></vmag>	? Intensity mean V-band magnitude	mag	float	phot.mag;em.opt.V
	13			Per	Period (longest period for double and triple	d	double	time.period
	14			e_Per	Uncertainty of the period	d	double	stat.error
	15		JD	TO	? Time of maximum brightness (HJD-2450000)	d	double	time.epoch
	16	$\checkmark$		Iamp	? I-band amplitude (maximum-minimum)	mag	float	src.var.amplitude
1	17			R21	? Fourier coefficient R_21_		float	stat.fit.param
	18			phi21	? Fourier coefficient {phi}_21_	rad	float	stat.fit.param
	19			R31	? Fourier coefficient R_31_		float	stat.fit.param
	20			phi31	? Fourier coefficient {phi}_31_	rad	float	stat.fit.param
	21	N N N		LC	Plot the light curve		char	meta.ref.url
	22			PerM	? Shortest (double mode) or Medium (triple	d	double	time.period

#### • Reference time system: JD(TDB,Barycentric)

## □ The result...


- Detection of catalogs containing temporal measurements (epochs)
- New kind of panel
  => Time view panel
- Ability to draw any time series in these times views (TIME column vs another column)

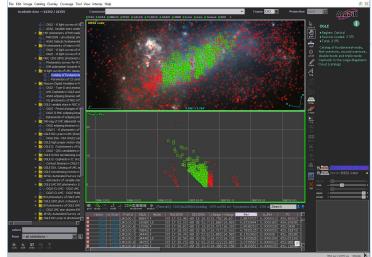

• Ability to cross select objects

Aladin v10.0 \*\*\* BETA VERSION (based on v10.087) \*\*\*

File Edit Image Catalog Overlay Coverage Tool View Interop Help

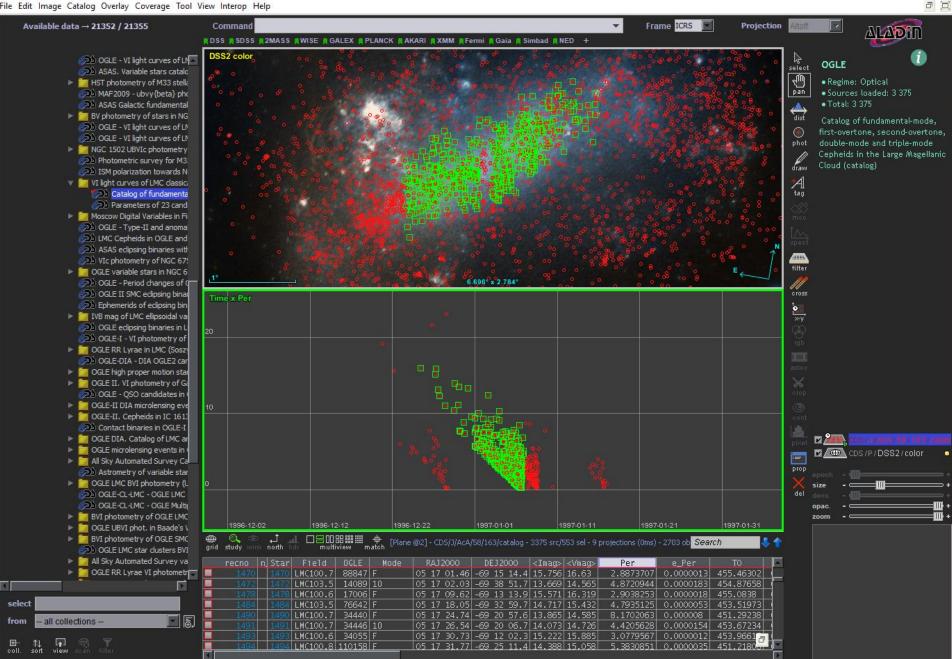

X 553 sel / 3375 src 362Mb

#### **Time exercice level 2...**

- Can we have a computer dedicated system for manipulating time
  - Fast, interoperable, multi-resolutions, packageable...
- We did MOC for the space (S-MOC), why not reuse MOC for Time (T-MOC)


### □ In Aladin proto...

- WE reuse MOC lib as is (50 additional java code lines for time extension)
- Proposal: TMOC conventions:
  - JD(TDB,Barycentric,no offset)
  - Order 29 -> 1  $\mu$ s TMOC resolution
  - Allow to describe 9133 years from JD=0

See Thomas Boch talk – Python Time MOC


## □ The results...

- We can manipulate Time coverages:
  - Generation
  - Manipulation (intersection, union, ...)
  - Drawing (easy zoom in thanks to the hierarchy nature of the MOC)
  - Packaging (as a MOC = FITS binary table)

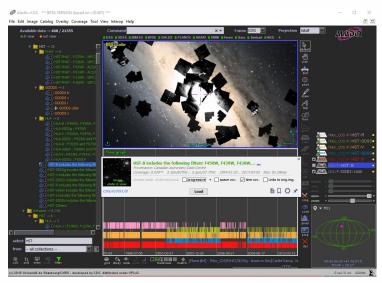

Aladin v10.0 \*\*\* BETA VERSION (based on v10.087) \*\*\*

File Edit Image Catalog Overlay Coverage Tool View Interop Help

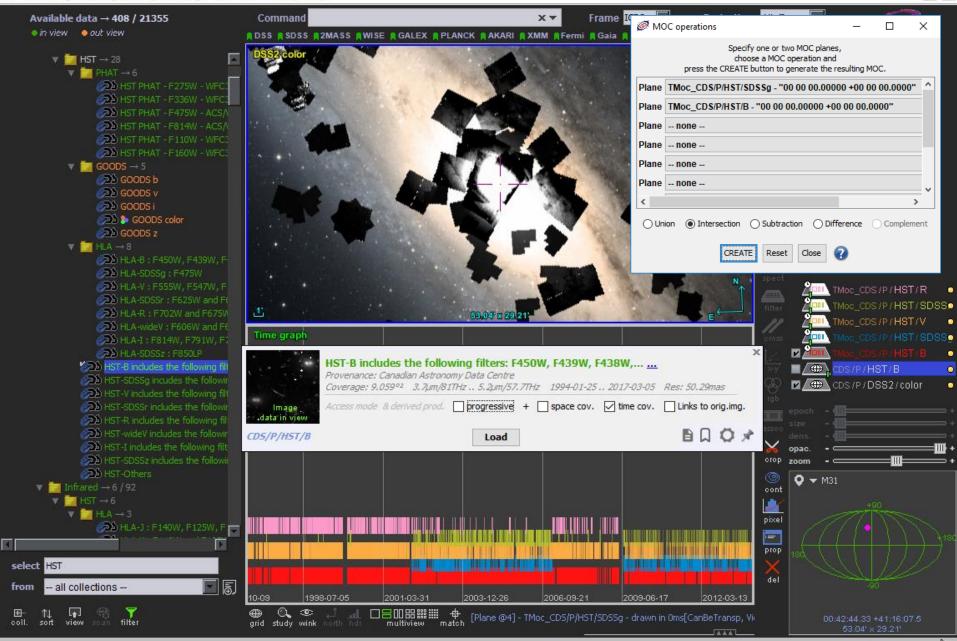

× a joj

## □ The live demo…

Please do not load the net for the next 5 minutes...thanks

Load a Cepheid catalog Draw time vs period See the spatial / time correlation Compare with another Cepheid catalog Load a list of observations (SIAv2) Draw time vs exposure Compare with another providers Generate T-MOC for both Do the intersection



#### Next level => MocServer

- We will build T-MOC for all VO collections. We will start with HiPS and VizieR catalogs
- Ingest them in the MocServer
  = 20 000 (ID, properties, S-MOC, T-MOC)
- Use them to filter dynamically the Aladin discovery tree (in green the collections having at least one observation in a given time range

## Future levels ?

#### • Query by T-MOC

use TMOC as a query parameter

- Space&Time MOC : merge together both dimensions in a unique MOC in order to have simultaneously space and time coverage
  - constraint 1: coded in 64 bits => requires to degrade space and time resolution (approximatively 14 arcmin and 1 day)
  - constraint 2: maybe too big in practice (combinatory explosion)

# Do it your self...


 Proto available for tests, explorations, ... http://aladin.u-strasbg.fr/java/AladinBeta.jar



#### Aladin v10.0 \*\*\* BETA VERSION (based on v10.088) \*\*\*



File Edit Image Catalog Overlay Coverage Tool View Interop Help

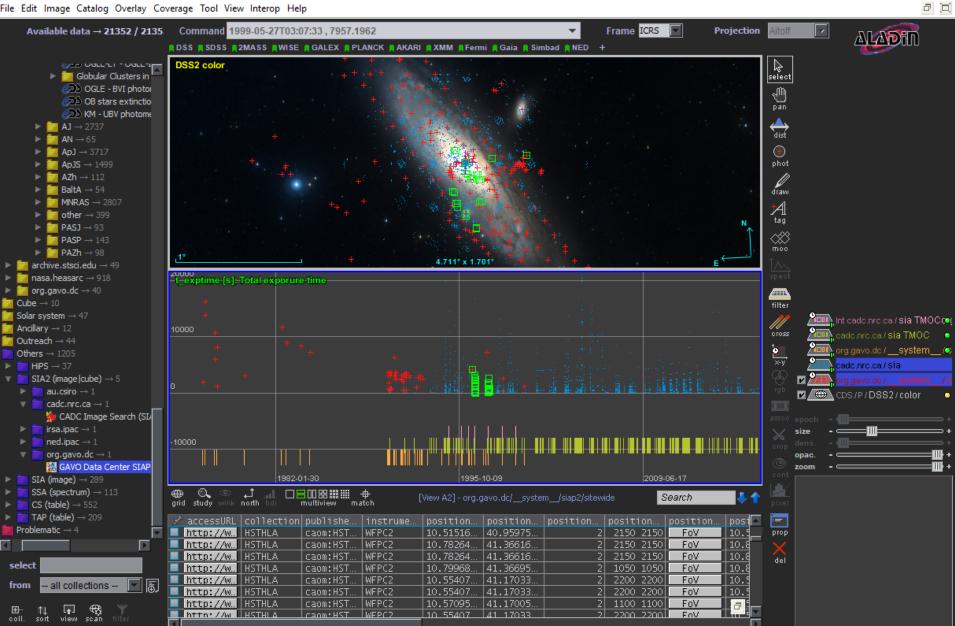

(c) 2018 Université de Strasbourg/CNRS - developed by CDS, distributed under GPLv3